

ZKTeco

BS-32E11C-C

Total Series - Color 24/7

2MP Bullet Type Analog Camera



- Sensor CMOS 1/2.8" 2MP
- Salida de video TVI/AHD/CVI/CVBS
- White light range of 10-20m
- High-quality 2.8/3.6mm lens
- Lightning protection up to 6kV
- Compatible con desempañador /AGC/AWB/BLC/DWDR
- IP67 Protection Index



Description

Powered by a state-of-the-art F1.0 wide-aperture lens and warm white LED illuminators, ZKTeco's Total Color 24/7 series camera presents a high-quality color image with rich detail even in total darkness conditions. It promises to deliver authentic ID 24 hours a day, 7 days a week.

It also provides an integrated UTC function to flexibly adjust signal output between the four technologies to match third-party DVR brands across multiple brands. It is an ideal solution with a high performance ratio and ease of installation for SMEs.

Functions

Total Color and Starlight

Integrated with an F1.0 wide aperture lens and a high-performance 1/2.8" sensor. With a greater amount of light absorbed and an advanced image processing algorithm, the camera features impressive low-light performance with an exceptional balance between noise reduction and blurriness of objects. on the move. With 4 warm white LED illuminators, it can provide a colorful and vivid image even in total darkness.

Long Distance Transmission

Powered by industry-leading HD video loss technology, it supports transmissions up to 500m/800m via separate RG59/RG6 coaxial cables.

Advanced 4-in-1 Technology

Integrated with advanced 4-in-1 technology and equipped with an integrated UTC chipset, they support flexible adjustment of HD analog signal output, such as TVI/AHD/CVI/CVBS. It is the ultimate solution for the true plug-n-play to work with any brand of HD analog DVR without problems.

Protection

With their robust and mechanical metal housing design, with IP67 rating they could withstand water and dust for a long time. It supports an input voltage tolerance of $\pm 30\%$ and operates safely under unstable power conditions. It works well in various harsh outdoor environments with a working temperature range of -20°C to 60°C .

Technical Parameters

Camera

Model	BS-32E11C-C	Effective Pixels	1920*1080
Image Sensor	1/2.8" 2MP CMOS Sensor	LED No.	4
Scanning System	Progressive	White Light Distance	10~20m
Minimum Illumination	0.01Lux / F1.0(color)	S/N Ratio	>58.3dB

Spring

Focal length	28 mm	3.6mm	Aperture	F1.0
FOV	99.5°	87°		

Video

Video Output	TVI/AHD/CVI/CVBS	AGC	Supported
Resolution	25/30fps@1080p	Day / Night	Automatic
OSD Menu	Supported	White Balance	Supported
BLC	Supported	Noise Reduction	2D DNR
WDR	DWDR		


General

Working Temperature	-20° C to 60° C	Protection Index	IP67
Working Humidity	10 to 90%	Dimensions (L*W*H)	170 * 75 * 65 (mm)
Source of Power	DC12V±10%	Neto Weight	0. 30kg
Energy Consumption	<3.2W (LED apagado)	Gross Weight	0. 45kg

Nomenclature

Camera	Model	Description
2MP Analog Camera	BS-32E11C/12C-C	Analog Bullet Type Camera 2MP Color 24/7

Dimensions (mm)

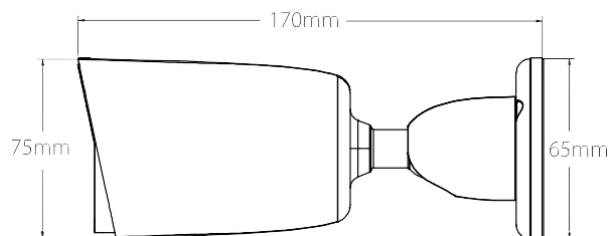

www.zkteco.com



Copyright © 2022, ZKTeco CO., LTD. All rights reserved.

ZKTeco may, at any time and without prior notice, make changes or improvements to the products and services or stop their production or commercialization. The ZKTeco logo and the brand are owned by ZKTeco CO., LTD.

