

BL-32C28L | E series

Starlight/WDR 2MP HD Analog Bullet Camera



- 1/2.8" 1080P Starlight/WDR Sony Sensor
- AHD/TVI/CVI/CVBS Video Output
- IR Effective Range 20 ~ 30m
- High Quality Motorized Lens 2.8 ~ 12mm
- Lightning Protection up to 6KV
- IP67 Ingress Protection



System Overview

E series HD analog camera adopts advanced 4-in-1 ISP and 1/2.8" image sensor, featured by the excellent image details in extreme low light as well as strong light contrast environment and compact design with unique 1-key installation base. It offers built-in UTC function to switch the signal output flexibly among the 4 popular formats. It's ideal solution for SMB solution with high cost-performance ratio and simple installation.

Functions

Long Distance Transmission

Powered by leading HD Videoloss technology, it supports up to 500m/800m transmission through RG59/RG6 coaxial cables respectively.

Smart IR

E series is designed with smart IR function to avoid IR LED overexposure when object/people is getting closer to the camera in the night, ensuring the light intensity is changing proportionally with the distance between camera and objects.

Advanced 4-in-1 Technology

E series is built-in with advanced 4-in-1 technology, it's equipped with UTC chipset on board which could support to adjust HD analog signal output flexibly, such as AHD/TVI/CVI/CVBS. It's the final solution for true plug-n-play to work with any brand of HD analog DVR seamlessly.

Protection

With precise mechanical and rugged casing design, it stands against water and dust with industrial IP67 rank.

Support $\pm 30\%$ input voltage tolerance, it could work safely in extremely unstable power condition.

With working temperature range from -30°C to $+60^{\circ}\text{C}$, it works well in a variety of harsh outdoor environments.

Technical Parameters

Camera

Model	BL-32C28L	Effective Pixels	1920(H)*1080(V)
Image Sensor	1/2.8" 2MP Sony Sensor	S/N Ratio	More than 52dB
Scanning System	Progressive	IR Distance	20~30m
Min. Illumination	0.005Lux/F1.4(color) 0 Lux with IR on	IR LED No.	2

Lens

Focal Length	Motorized 2.8~12mm	FOV	42°~107°
Aperture	F1.4		

Video

Video Output	AHD/TVI/CVI/CVBS	Defog	Supported
Resolution	25/30fps@1080P	AGC	Supported
OSD Menu	Supported	Day/Night	Auto(ICR)/Manual
BLC	Supported	White Balance	Supported
WDR	120dB	Noise Reduction	2D/3D DNR


General

Working Temperature	-30°C~+60°C	Ingress Protection	IP67
Working Humidity	10~90%	Dimensions	186.5 (L)*71.7 (W)*84 (H)mm
Power Supply	DC12V±10%	Net Weight	0.5KG
Power Consumption	<3.2W(IR cut off)	Gross Weight	0.64KG

Ordering Information

Type	Part Number	Description
2MP Camera	BL-32C28L	2MP Analog Camera(2.8~12mm Lens)

Dimensions (mm)

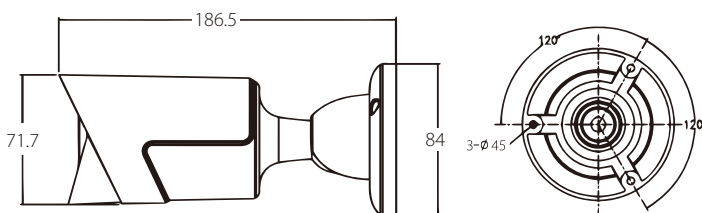

More details